

**Stop Drainage Odours,
Pests, Gases & Pathogens.**

Choose Green Drain™.

MARKETED
PAN-INDIA
BY →



AQUA™

Products & Services Pvt. Ltd.



Key Features!



Prevents odours from coming up your drain



Stops pests from entering your premises



Prevents spread of viruses and bacteria



Protects from dangerous sewer gases



Limits minor sewer backups



Allows high flow of water down drain

Simplistic in Design


3. Silicon Skirt

1. Outer Anchor

2. ABS Housing




Simple Concept, Easy Installation, **Pure Results!**

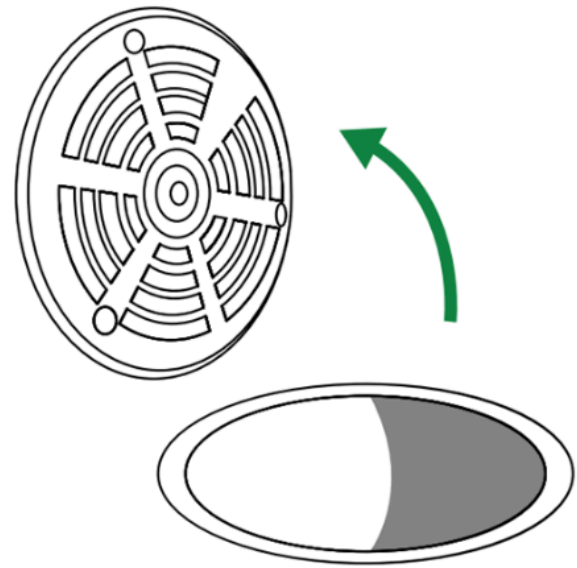


Step 1

Remove Grate

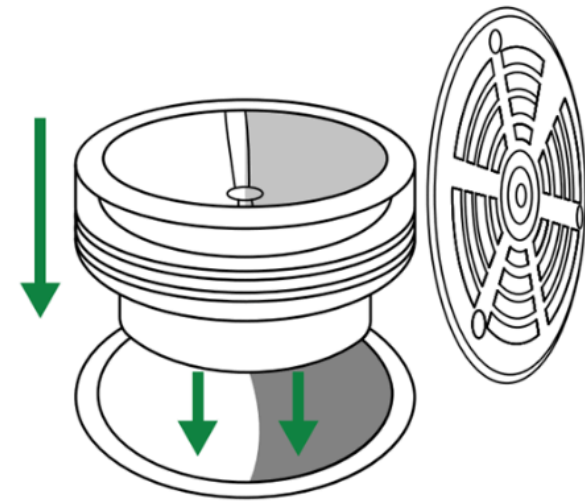


Step 2

Insert Green Drain™

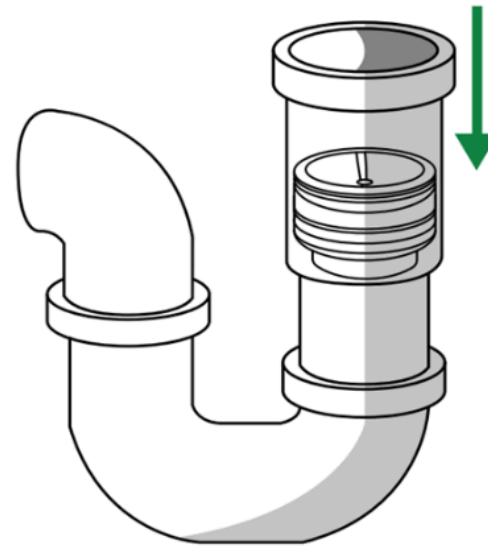


Step 3

Recess 2" to 4" 3 Into The
Physical Pipe

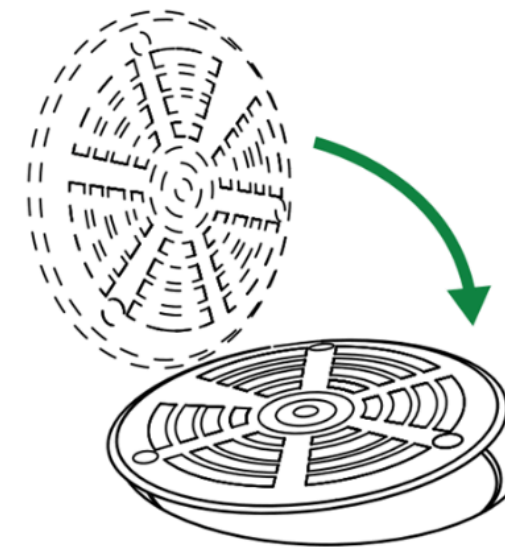

Step 4

Close Grate

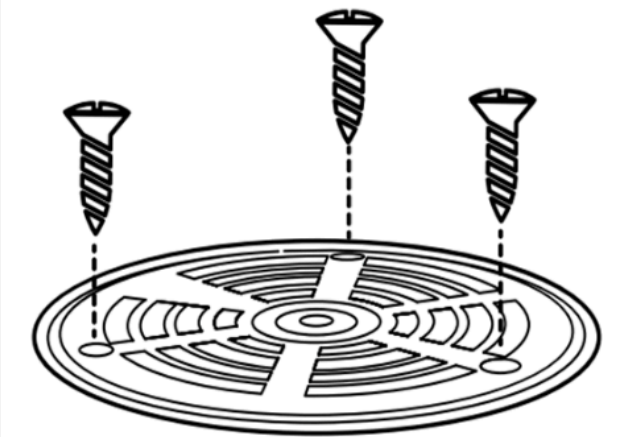

Step 5

Fasten Screws

WHY Choose Us?

Patented Self Sealing Silicon Skirt

High Flow Rates

No Cutting to Size (**11 Sizes Available**)

Hybrid Sizes to fit mismatching ID-ODs!

Easy to Remove, to **clean & maintain**

NO Moving Parts, Hinges or Springs!

Only 51mm in profile (Max height)

Can be Installed **Retrofit!**

Videos for Reference



WHO do we Help?




HOTELS



MALLS



VILLAS



PEST CONTROL



INDUSTRY



OFFICES



MARITIME



HOSPITALS




SCHOOLS



CAFÉ

Available in **8 Standard Sizes!**

For Kitchen Sinks and Urinals (Waste Coupling)

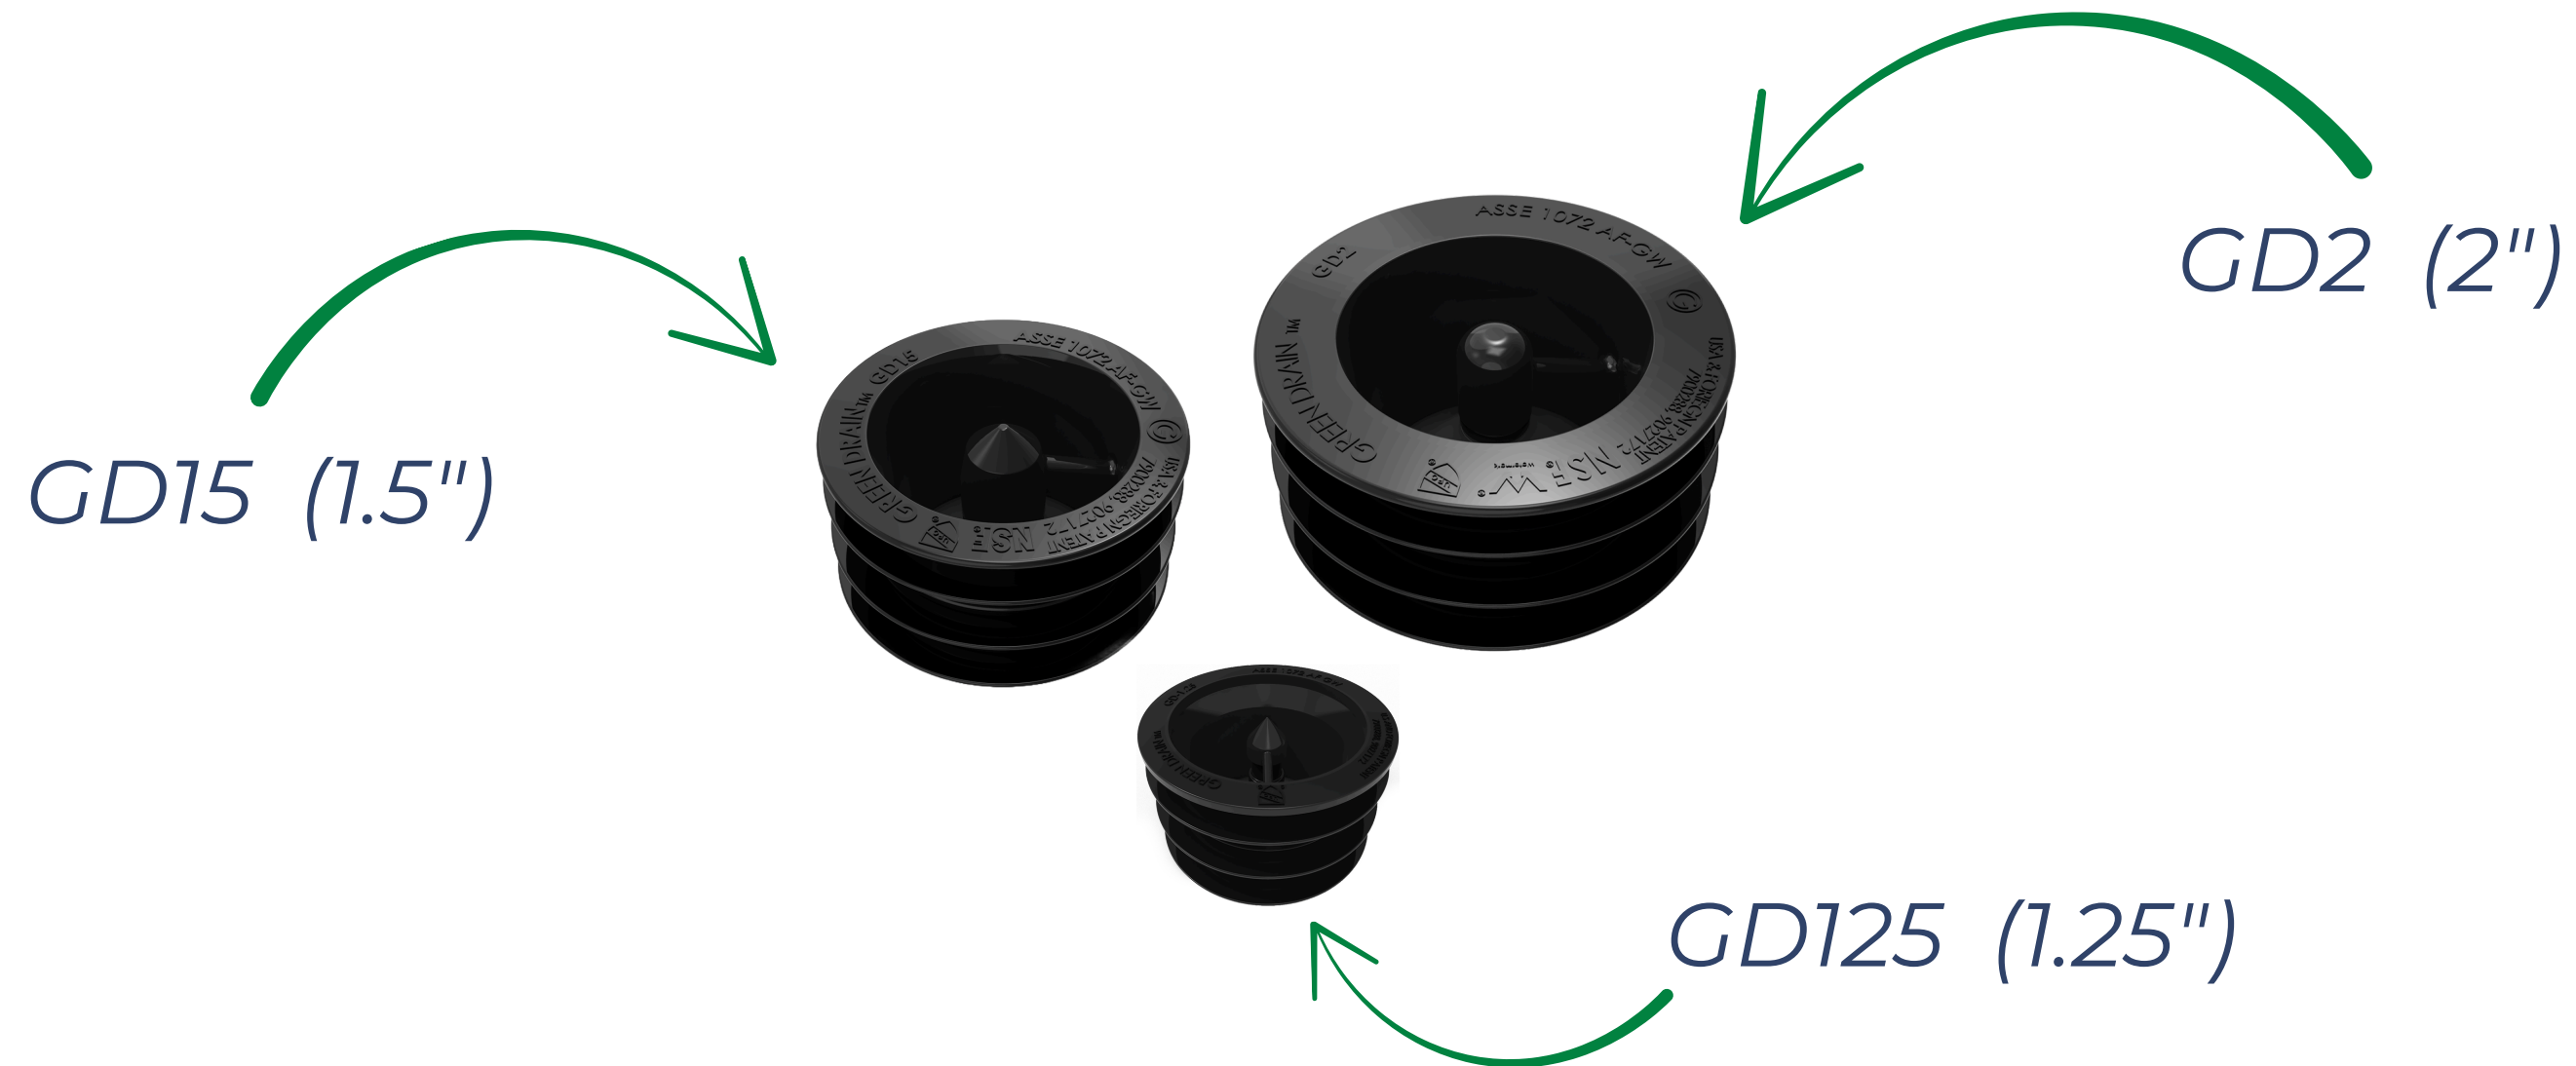

Available in **8 Standard Sizes!**

For Floor Traps in Shower-rooms and Toilets



GD3 (3")



GD35 (3.5")



GD4 (4")

Available in **8 Standard Sizes!**

For Industrial / Commercial Kitchens

GD5 (5")



GD6 (6")



All Available Sizes

Model No.	Pipe Size	Height	Flow Rate
GD1.25	32mm - 35mm	25mm	29.22 LPM
GD1.5	36mm - 44mm	35mm	51.55 LPM
GD2	48mm - 58mm	35mm	82.50 LPM
GD2.5	55mm - 65mm	35mm	72.50 LPM
GD3	75mm - 85mm	50mm	105.70 LPM
GD3-3.5 EG	80mm - 90mm	50mm	105.70 LPM
GD3.5	89mm - 94mm	50mm	323.17 LPM
GD 3.5-4 EG	90mm - 100mm	50mm	323.17 LPM
GD4	102mm - 110mm	50mm	≥340 LPM
GD5	120mm - 135mm	40mm	391 LPM
GD6	148mm - 155mm	51mm	≥550 LPM

CERTIFICATIONS



The Self Sealing Membrane is approved by ABCB/APMO (Watermark) WMTS 522:2021 to be used as a SUPPLEMENTARY PROTECTIVE DEVICE.

Complies with ASSE 1072-2007, ICC-ES Certified to be used in conjunction with a trap primer, unless approved as a deemed-to-satisfy and/or performance solution



Products & Services Pvt. Ltd.

 +91 88791 40198

 enquiry@aquaproducts.in

 www.aquaproducts.in

↑ *Click to Know More* ↑



Green Drain™



